

# EDGELESS SERIES


## 2-Way In-Ceiling Speakers

A seamless blend of high-end audio & interior design



Model:  
ECS-6.5

Model:  
ECS-8.0

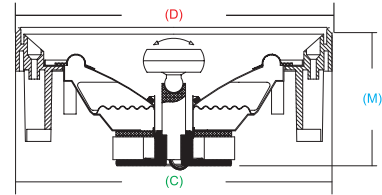

ECS-6.5                      ECS-8.0

(D) Diameter	8 9/16" (217mm)	10-1/2" (267mm)
(C) Cut Out Hole	7-7/8" (200mm)	9-1/2" (240mm)
(M) Mounting Depth	4 5/16" (110mm)	4-7/8" (124mm)



### OBJECTIVE

The Edgeless Series of In-Wall & In-Ceiling Speakers is one of Earthquake Sound's most valued speaker lines. Designed with aesthetics (WAF-wife approval factor) and sound quality in mind, these speakers seamlessly blend into their surrounding as they provide a lifetime of durability and high-end performance.

The goal here is to seamlessly blend into any interior decor and to reproduce the sound of a concert hall or the sound of a movie sound track in any room with ceiling mounted speakers.

The EDGELESS speakers deliver deep, natural bass from the design of their advanced cone and surround. Superb sonic accuracy is guaranteed by the utilization of stiff kevlar in the woofer and silk in the tweeters. Additionally, you can customize the sound of the speakers with +/- 3dB adjustment switches that optimize the sound to the acoustics of the room and end user's own personal preference.

### INTENDED USE

- ✓ Architects Custom Projects / high-end designs
- ✓ Contractors, Custom Installers and Retailers
- ✓ Kitchens, Hall-ways, Bathrooms, Atriums
- ✓ New Construction & Retrofit Applications
- ✓ Home Theater & 2-Channel/Music Systems
- ✓ Can Be Used in Both Boats and RV's

### SPECIAL FEATURES & HIGHLIGHTS

- Frameless design for reduced visibility/seamless blend
- 1" (25mm) silk dome NEO swivel-action tweeters
- Low mass stiff kevlar cone bodies for a very smooth & accurate output with attention to details
- ± 3dB bass and treble controls
- Elaborate crossover networks with highest quality capacitors and inductors. 12dB/Octave with polyswitch protection.
- Easy Turn-N-Lock™ installation mechanism for safe, time efficient and professional installation.
- Gold plated, spring loaded terminals
- Magnetically attached, paintable grilles

### SPECIFICATIONS

	ECS-6.5	ECS-8.0
Tweeter / Cone	1" (25mm) silk dome NEO swivel-action tweeter Low mass stiff kevlar cone body	
Power Handling	300 Watts	400 Watts
Frequency Response	40Hz - 20kHz	30Hz - 20kHz
Woofer	6-1/2"	8"
Impedance	8-Ohm	8-Ohm
<b>MSRP</b>	\$325.00/pr	\$399.00/pr