


## DESCRIPTION

The SR-H3S Line Array Speaker forms a linear sound source by the internal speaker units arrayed vertically in close proximity. It can be used for high-impedance applications with the installation of the optional MT-S0301 Matching Transformer.

## SPECIFICATIONS

|                         |   |
|-------------------------|---|
| Enclosure               | Bass-reflex type  |
| Power Handling Capacity | Continuous program: 360 W   |
| Rated Impedance         | 8 Ω   |
| Sensitivity             | 92 dB (1 W, 1 m equivalent, measured at 8 m)  |
| Frequency Response      | 90 Hz - 17 kHz (when using an optional digital processor)   |
| Directivity Angle       | Horizontal: 90°<br>Vertical: 20°  |
| Speaker Component       | 7 cm (2.8") cone-type × 16  |
| Input Connector         | Removable input connector   |
| Finish                  | Enclosure: MDF, white, urethane paint<br>Front grille: Punched steel plate, white, acrylic paint  |
| Dimensions              | 84 (W) × 1177.2 (H) × 157 (D) mm (3.31" × 46.35" × 6.18")   |
| Weight                  | 7.9 kg (17.42 lb)   |
| Option                  | Matching transformer: MT-S0301<br>Extension plate: SR-EP3<br>Wall mounting bracket: SR-WB3<br>Wall tilt bracket: SR-TB3<br>Flying bracket: SR-FB3<br>Stand adapter: SR-SA3 (Applicable stand: ST-34B)<br>Digital processor: DP-0206 |

## APPEARANCE

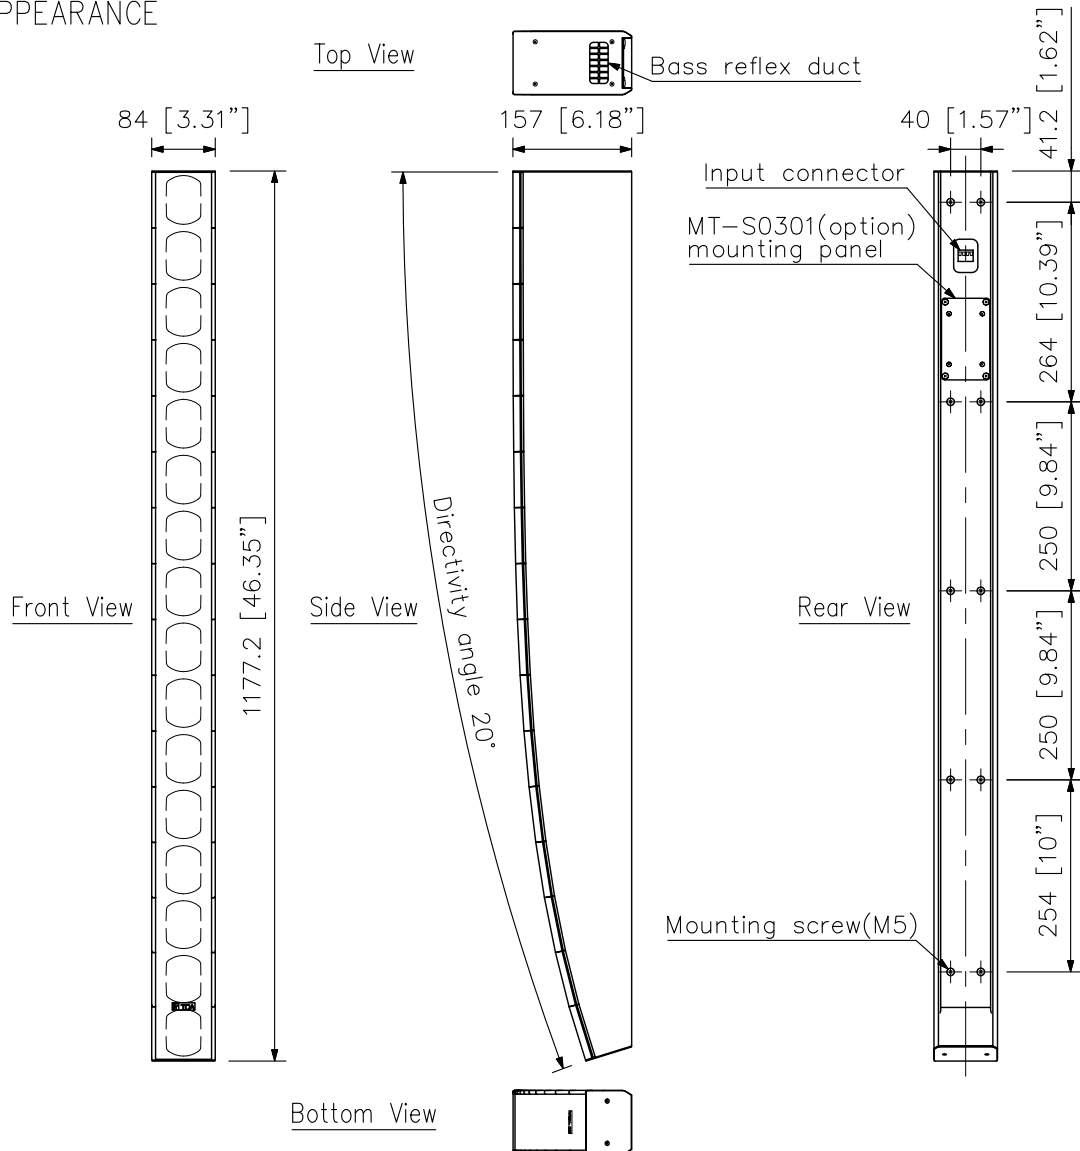

UNIT:mm SCALE:1/10